

Cable F Connector



22.3.5
22.3.5M
22.3.5L

Description

Cable F connector. It can be inserted into any of the 22 System mounting plates.

Electrical

24V DC, 500mA max

Materials

Polycarbonate casing, electrical components.

Finishes

White, almond, black.

Patents


US # 7,956,295 B2 & 8,912,439 B2
Worldwide utility patents pending.

Certifications




Diagram

Thread the coaxial RF cable through the barrel as illustrated. Screw the coaxial cable onto the threaded stem and snap the barrel onto the face plate.

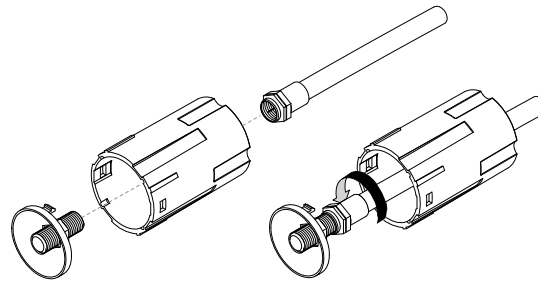


Best practice statement: For ease of future access or maintenance, we recommend a single incoming wire to the junction box (no J-box splices) immediately behind the 22 System receptacles.

Dimensions




35 (1.38")




34.9 (1.4")

short barrel
22.3.5



48.2 (1.9")

medium barrel
22.3.5M



60.4 (2.4")

long barrel
22.3.5L