



# Removal Guide: Drywall / Alternate Material


1. Align groove at top of removal tool to top of the operative component.



5. When repairs are completed, carefully insert wiring back into the interior of the junction box. Then, insert the operative component back into the opening and ensure all four locking tabs are engaged.

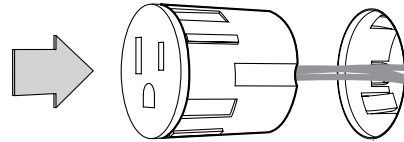


2. Push removal tool carefully into the reveal surrounding operative component until it is flush to the wall.

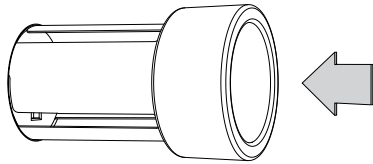

6. Touch up drywall and paint if needed.

3. Carefully pull out the operative component by tension fit.

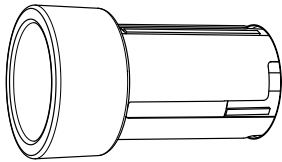

4. Carefully withdraw wiring from the interior of the junction box and perform any necessary repairs. The wiring differs between product, see individual spec sheet for details.

